


TENDURA 

TENDURAPLANK™

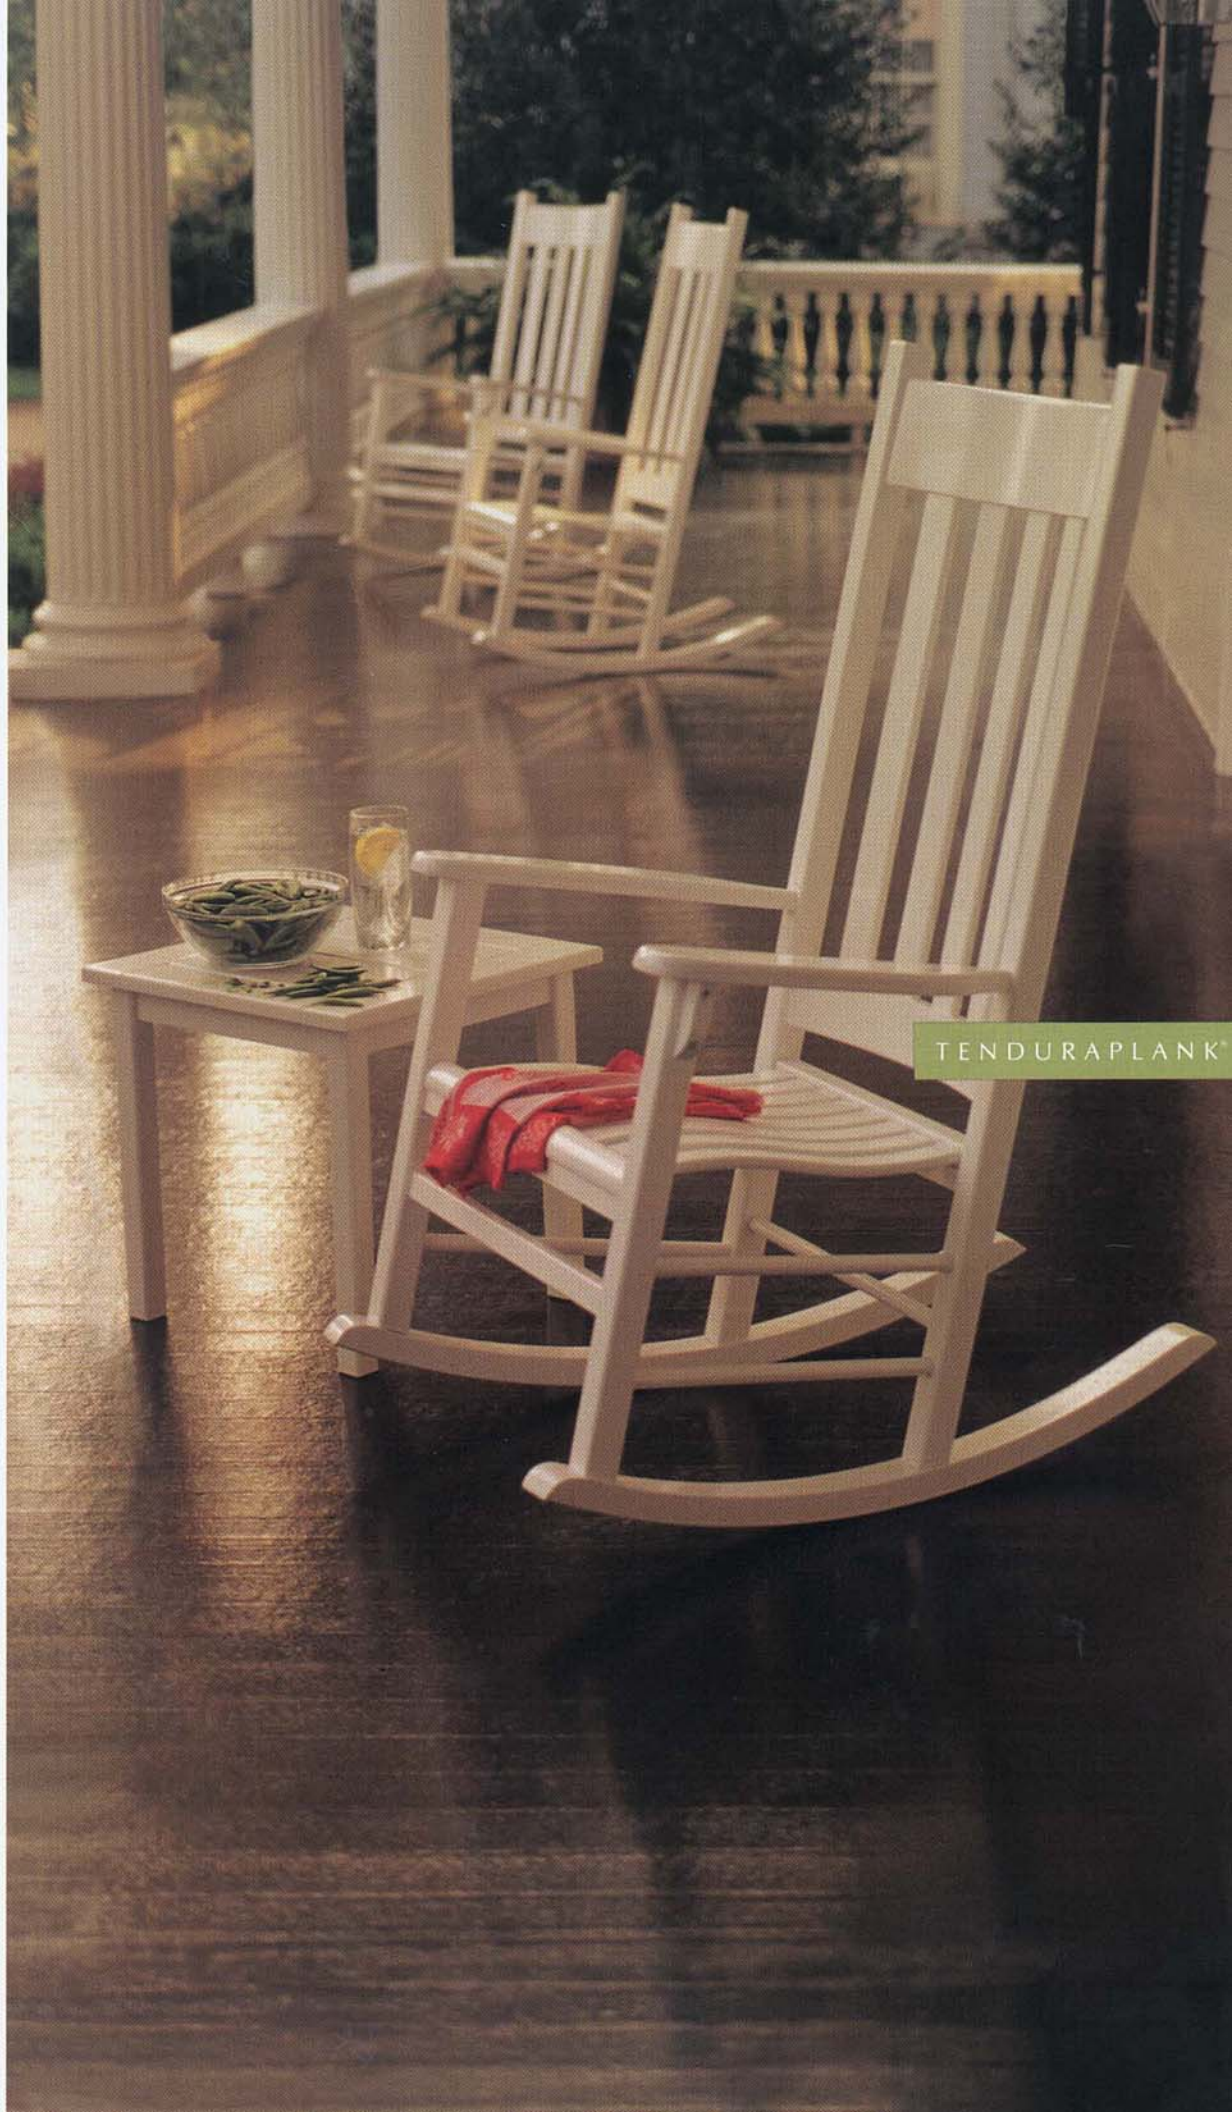

TENDURAPLANK®

1-800-TENDURA (836-3872) www.tendura.com

HISTORIC AUTHENTICITY

TenduraPlank provides the historic beauty of a traditional wood front porch without the rot and deterioration of tongue-and-groove lumber. TenduraPlank is fungus and termite-resistant and is made to expand and contract less than lumber. Tendura's proprietary tongue-and-groove joint is engineered to provide a secure but visible seam, emulating the traditional tongue-and-groove lumber it replaces. TenduraPlank comes primed and does not need to be sealed like traditional wood. The warmth of wood combined with the durability of plastic — Tendura is made to last a lifetime.

STORAGE & HANDLING

TenduraPlank can be handled just like traditional porch flooring. Like wood, it should be allowed to acclimate to the environment in which it is being installed for a minimum of 24 hours prior to installation.

INSTALLATION, CUTTING, ROUTING AND FASTENING

TenduraPlank is to be used in covered porch applications only and not exposed deck applications. Cut and route TenduraPlank with carbide-tipped products. TenduraPlank must be installed 16" on center using a standard flooring nailer with 2" stainless steel flooring nails or 2" galvanized flooring staples.

DIMENSIONS

TenduraPlank is available in 7/8" x 3-1/8" and 5-1/4" widths and is available in 8', 10', 12', 14' and 16' lengths. Tendura offers two nosing piece designs to finish off the edge of the porch; 1" half-round and 7/8" x 1-7/8" ogee. Each design is available in 10-foot lengths.

PAINT

TenduraPlank comes factory-primed and is ready to receive any high quality exterior porch floor paint or deck stain. Tendura requires a finish coat with an exterior latex, alkyd or exterior deck stain. See our website for recommended Olympic and Pittsburgh paint products.

WARRANTY

TenduraPlank comes with a lifetime warranty to the purchaser against rot and deterioration for as long as they own their home. TenduraPlank must be installed in accordance with Tendura's installation instructions. See our website for the complete written warranty and installation instructions — www.tendura.com or call us at 800-TENDURA (836-3872).



SPECIFICATIONS

	Test Standard
Modulus of Elasticity (psi)	ASTM D1037
Coeff. of Thermal Expansion	ASTM D696
Water Absorption (% 24 hrs)	ASTM D1037
Slip Resistance	ASTM F-1679-96
Flame-Spread Index	ASTM E84
Nail Withdrawal (lb)	ASTM D1037
Modulus of Rupture (psi)	ASTM D1037

TenduraPlank meets or exceeds all testing standards. Detailed test results can be viewed at www.tendura.com. TenduraPlank must be installed in accordance with Tendura's installation instructions.

